

DVI Extender



Route your computer's desktop output anywhere using regular SDI cables! DVI Extender can be used in extender mode for routing your desktop output to another monitor or in video mode for converting the DVI-D output to SD/HD-SDI video signals for input into live switchers, decks and more. DVI Extender is USB powered and small enough to use in any location.

405 €*

Anschlüsse

Video Input

1 x DVI-D

Video Output

1 x 3 Gb/s SD/HD-SDI


Audio Input

1 x 3.5mm stereo mini jack

Video Mode Resolutions

When set to Video mode based resolutions, DVI Extender will output conventional SDI video to match the selected video standard.

Select 720 x 486 for 525i/59.94 (NTSC), 720 x 576 for 625i/50 (PAL), 1280 x 720 for 720 HD and 1920 x 1080 for 1080 HD video formats.

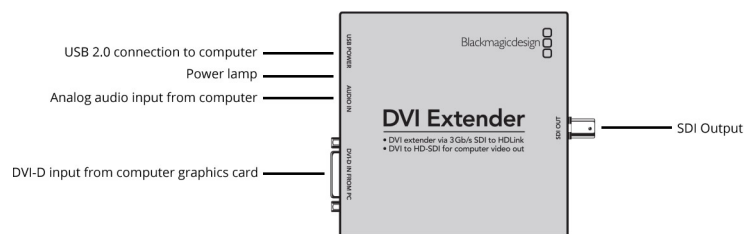

Software

Upgrades and Configuration

USB 2.0 high speed (480Mb/s) interface.

Extender Mode Compatibility

Extender Mode Compatibility

Extender mode is compatible with the following HDLink models: HDLink Pro DVI, HDLink Optical Fiber, HDLink Pro DisplayPort.

Strombedarf

USB

1 X USB 2.0 port and cable

Power Supply

Requires USB 2.0 connection for power. Compatible with iPod USB power adapter.

Betriebssysteme




Mac OS X 10.10 Yosemite,
Mac OS X 10.11 El Capitan
oder höher



Windows 8.1 oder
Windows 10

Physische Spezifikationen

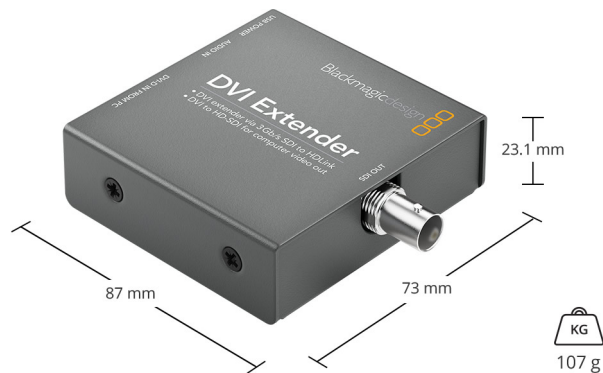

Physische Installation

Blackmagic Converter Utility software installed via computer's USB 2.0 port.

Umgebung

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 45° C (-4° to 113° F)

Relative Humidity

0% to 90% non-condensing

Im Lieferumfang enthalten

DVI Extender

Software CD

Garantie

12 Month Limited Manufacturer's Warranty.

Für alle Elemente auf dieser Website gilt das Copyright von Blackmagic Design Pty. Ltd. 2017;
Alle Rechte vorbehalten. Alle Handelsmarken sind Eigentum ihrer jeweiligen rechtmäßigen
Besitzer.
*Unverbindliche Preisempfehlung inkl. MwSt. zuzüglich Versand- und Zustellungskosten.

Zugelassene Blackmagic Design Reseller